

PROJECTION SCREEN



FIBERGLASS



FR




PROJECTION SCREEN

www.ipek.ir

PROJECTION SCREEN - TECHNICAL INFORMATION

On axis 0° Gain: 1.1
Viewing Cone: 180°

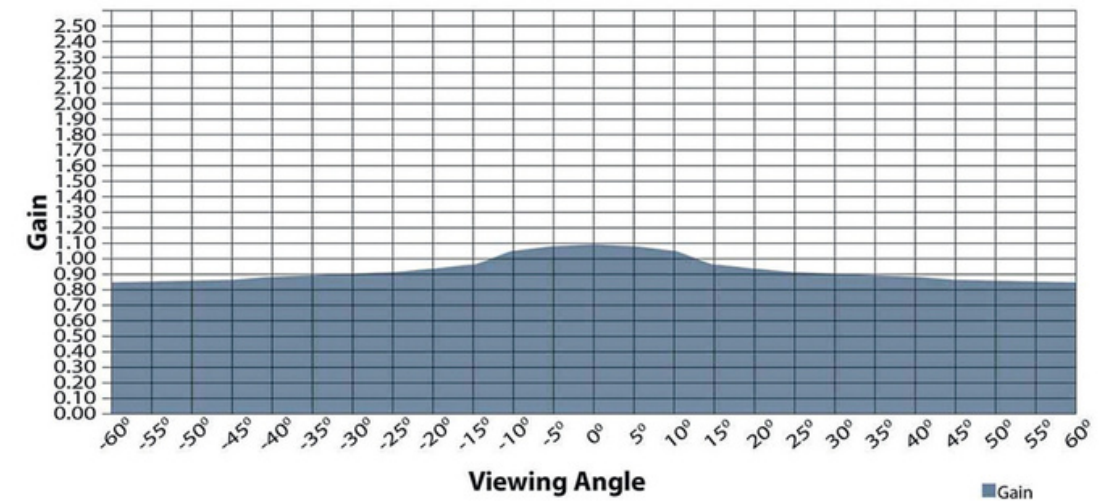

Multi-layer weave with textured surface

Fiberglass backing with black backing

Gain: 1.1

View Angle: 180° (90° ± LR)

Not compatible with Ultra/Short-throw Projectors

Mildew Resistant

Active 3D, 4K/8K Ultra HD, and HDR ready

Surface can be cleaned with hand or soft soap diluted in warm water using a fiber cloth

Flame Retardant: Complies with NFPA 701 Standards

GREENGUARD® and GREENGUARD® Gold Certified | UL 2818

MaxWhite® Fiberglass (FG) is fiberglass backed for added stiffness which provides the flattest possible non-tensioned screen surface with universal applications. This material provides wide viewing uniform diffusion while giving precise definition, color reproduction and black & white contrast. The screen surface has a black-backing to eliminate light penetration, is mildew resistant and washable with mild soap and water.

* Manufacturer tip: This is an enhanced matte white product for higher end DLP/LCD projectors suitable for commercial and residential presentations.

